SBAIPEPGTA




Sled chair


Generous proportions and wraparound lines, a versatile piece that has a noble and welcoming appearance. The Bai sled chair, with its steel structure that holds up the seat with its soft and organic curves in polypropylene or upholstered.


DESIGNED BY ANDER LIZASO



ondarreta







DIMENSIONS

60 cm x 53 cm x 78 cm x 45 cm $(23.6" \times 20.8" \times 30.7" \times 17.7")$ [width x depth x height x seat height]

WEIGHT

8 kg (17,6 lb)

PACKAGING

One chair per box, box dimensions:

67 cm x 72 cm x 85 cm (26,4" x 28,3 x 33,5")

CERTIFICATION

Product tested under the European standard EN 16139:2013, category of extreme use L2.

ACCESORIES

Cushion

Felt glides

OPTION

Outdoor

ORIGIN


100% Made in Europe

DESIGN

Ander Lizaso

ondarreta



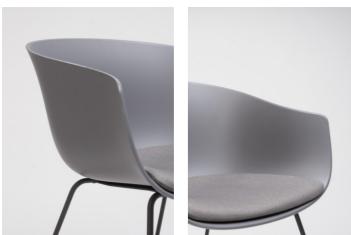



COMPONENTS

STRUCTURE

Material

12 mm (0.5") diameter cold laminated E-220 quality (EN-10305 Normative) steel rod.

Tensile Strength > 310 N/mm² (44,960 psi);

Elastic Limit > 220 N/mm² (31,900 psi), Elongation > 23%

Finish

Colour epoxy

SHELL

Texturized polypropylene

Impact textured copolymer to obtain matt finish. It has good mechanical properties. Very light and resistant to UV rays. Check for fireproofing.

Technical characteristics:

Density (s / ISO 1183): 900 kg / m³ Yield stress (s / ISO 527-1 / -2): 23 N / mm² Flexural modulus (s / ISO 178): 1100 N / mm² (23 ° C)

Textured matt, fabric, combi or seatpad.

METAL FINISH

EPOXYS

Powder covering formulated with polyester resins, with good both mechanical and chemical properties, outdoor maximum resistance and noxious compounds free. Electrostatic application and oven curated at 200°C (392°F).

Technical characteristics:

Thickness (ISO 2360): between 60 and 90 µm.

Adherence (ISO 2409): Grade: 0 (maximum adherence)

COM REQUIEREMENTS:

Full fabric: 125 cm (49.2") Fabric seat: 53 cm (20.9") Combi: 85 cm (33.5") Cushion: 50 cm (19.7")