

TECHNICAL CHARACTERISTICS

MGINBRBR





Ginger

Table low

Craftsmanship and technique go hand-in-hand in the Ginger table design. Available in different heights, this table stands out for the complex wooden curvature of its legs and the round shapes of its table top.

DESIGNED BY SEBASTIAN HERKNER



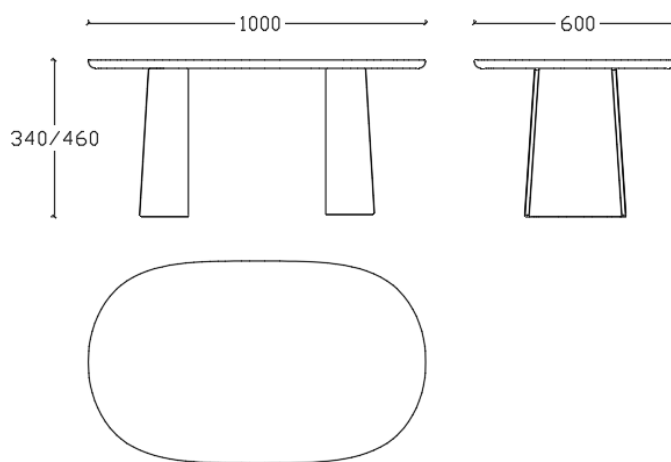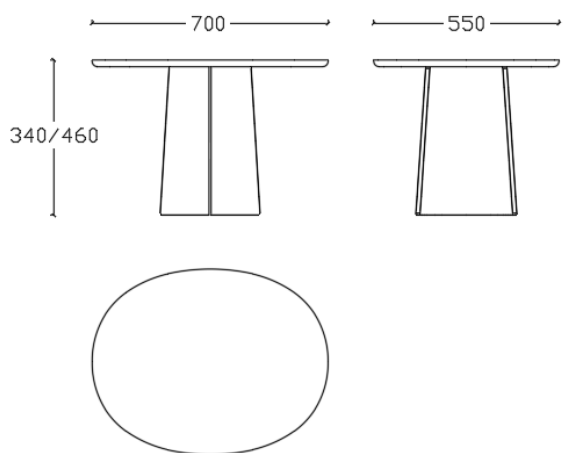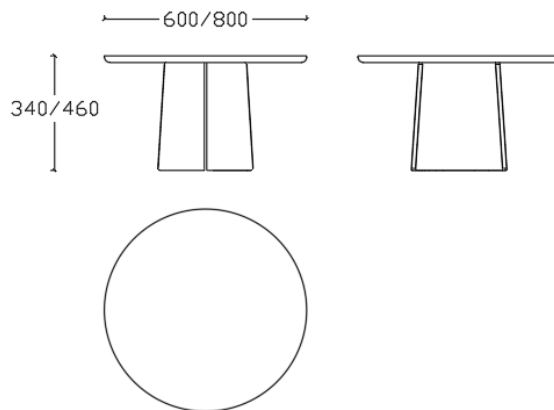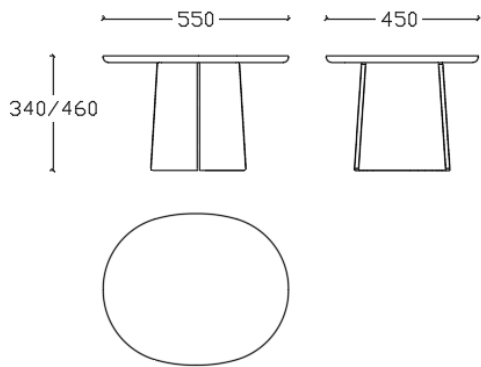

DIMENSIONS

Height: 34 cm (13,4")/ 46 cm (18.1")
 55 cm x 45 cm (21,7" x 17,7") [width x depth]
 70 cm x 55 cm (27,6" x 21,7") [width x depth]
 100 cm x 60 cm (39,4" x 23,6") [width x depth]
 60 cm (23,6") [diameter]
 80 cm (31,5") [diameter]

WEIGHT

8 kg [17,6 lb] (55x45)
 9 kg [19,8 lb] (70x55)
 14 kg [30,9 lb] (100x60)
 10 kg [22 lb] (ø60)
 13 kg [28,7 lb] (ø80)

PACKAGING

55x45: 62 cm x 48 cm x 50 cm (24,4" x 18,9" x 19,7")
 70x55: 70 cm x 67 cm x 50 cm (27,6" x 26,4" x 19,7")
 100x60: 100 cm x 67 cm x 50 cm (39,4" x 26,4" x 19,7")
 ø60: 70 cm x 67 cm x 50 cm (27,6" x 26,4" x 19,7")
 ø80: 88 cm x 80 cm x 50 cm (34,6" x 31,5" x 19,7")

CERTIFICATION

PEFC certify wood

ORIGIN

100% Made in europe

DESIGN

Sebastian Herkner



COMPONENTS

LEGS

Oak

Oak wood on 12 mm (0,5") thick beech. It is made with especially treated sheets to optimize bending, reinforced with alternate arrangement of fibers to gain resistance, glued, pressed and CNC machined.

Finish

Stained

TABLETOP SUPPORT

Steel

3 mm (0,12") thick laser cut steel sheet.

Finish

Epoxy black

TABLETOP

Oak + MDF

European Oak sheet on technical wood table of 20 mm (0,79") thick, CNC machined and beveled edge.

Arpa Fénix + MDF

Arpa Fénix laminate glued and pressed in high temperatures on technical wood table of 20 mm (0,79") thick, CNC machined and beveled edge.

Arpa fenix is an extremely opaque, anti-fingerprint and nanotechnological material that heals superficial micro-scratches.

Technical characteristics:

Urea-formol glue: low formaldehyde emission (E1 European Normative)

The wood has the PEFC certificate

WOOD FINISH

STAIN

Pigmented enamel with a transparent stain coating. Reactive drying paints: excellent adherence between layers and better mechanical resistance.

Technical characteristics:

Satisfying UNE-EN 71-3 normative; Formaldehyde free compounds.

METAL FINISHES

EPOXYS

Powder covering formulated with polyester resins, with good both mechanical and chemical properties, outdoor maximum resistance and noxious compounds free. Electrostatic application and oven cured at 200°C (392°F).

Technical characteristics:

Thickness (ISO 2360): between 60 and 90 µm.

Adherence (ISO 2409): Grade: 0 (maximum adherence)

